



DONATA 16B SLIMLINE BOILER – TECH. DATA


Wood pellet stove with integrated back boiler

| | |
|---|-------------------------|
| Average Thermal Heat Input (Min – Max): | 4.12 – 16.15kW |
| Performance Efficiency (Min – Max): | 92.93 – 97.11% |
| Nominal Overall Power Yield (Min – Max): | 4 – 15kW |
| Approx. Heating Capacity – Poor Insulation: | 70 – 240m ² |
| Approx. Heating Capacity – Good Insulation: | 200 – 715m ² |
| Pellet Consumption (Min – Max): | 0.95 – 3.3kg/hr |
| Pellet Tank Capacity: | 19kg |
| Approx. burn time (Min – Max): | 5.5 – 22hrs |
| Flue Outlet Diameter: | 80mm |
| Electrical Requirement (working): | 100W |
| Electrical Requirement (starting): | 300W |
| Net Weight: | 130kg |
| Dimensions (H x W x D): | 1,000 x 1,100 x 249mm |

Specifications and products may change at any time and without notice.



Available in a selection of colours: **bordeaux**, **cream**, or **black** with **dark grey** trim.
Clever, space-saving design, for limited spaces

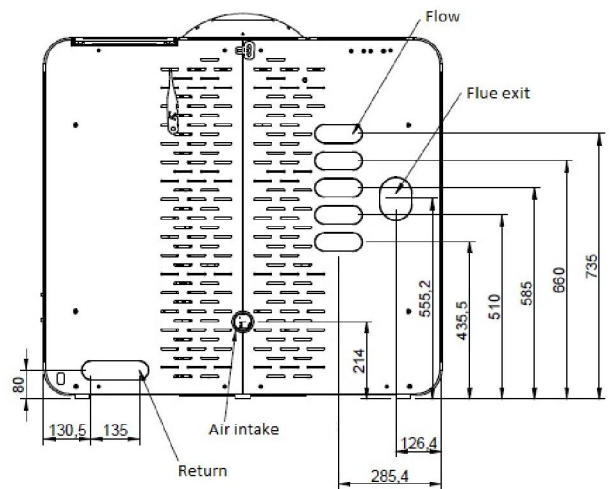

Your trusted local dealer:



EN 14785



15a B-VG

