

## REDONDA 20B BOILER STOVE – TECH. DATA

### Wood pellet stove with integrated back boiler


Average Thermal Heat Input (Min – Max):	5.26 – 19.03kW
Performance Efficiency (Min – Max):	95.74 – <b>96.71%</b>
Nominal Overall Power Yield (Min – Max):	5.08 – 18.22kW
Power Delivered To Water (Min – Max):	4.2 – 13.98kW
Power Delivered To Room (Min – Max):	0.88 – 4.24kW
Approx. Heating Capacity – Poor Insulation:	80 – 290m <sup>3</sup>
Approx. Heating Capacity – Good Insulation:	240 – 875m <sup>3</sup>
Pellet Consumption (Min – Max):	1.11 – 4.28kg/hr
Pellet Tank Capacity:	42kg
Approx. burn time (Min – Max):	10.5 – 37hrs
Flue Outlet Diameter:	80mm
Electrical Requirement (working):	140W
Electrical Requirement (starting):	360W
Net Weight:	207kg
Dimensions (H x W x D):	1,280 x 650 x 760mm

*Specifications & products may change at any time & without notice*



Available in a selection of colours:  
**black, bordeaux or white with black, glass door**  
 Stunning curved glass sides and door

**Your trusted local dealer:**

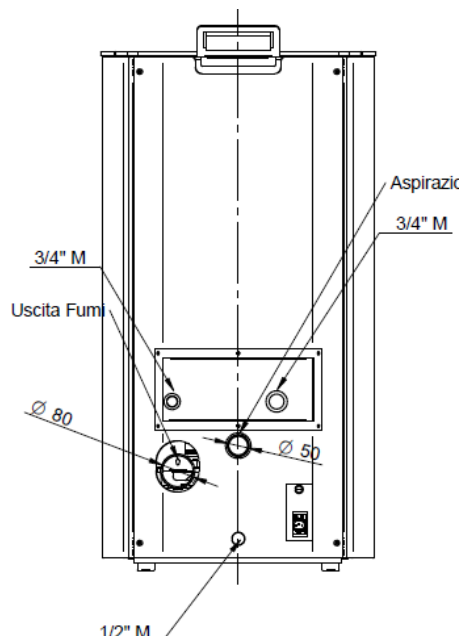

EN 14785



15a B-VG

