


## CLOE 17B BOILER INSERT STOVE – TECH. DATA

### Wood pellet stove with integrated boiler

Average Thermal Heat Input (Min – Max):	7.4 – 17.6kW
Performance Efficiency (Min – Max):	94.0 – <b>96.30%</b>
Nominal Overall Power Yield (Min – Max):	7.1 – 16.5kW
Approx. Heating Capacity – Poor Insulation:	115m <sup>3</sup> – 260m <sup>3</sup>
Approx. Heating Capacity – Good Insulation:	340m <sup>3</sup> – 800m <sup>3</sup>
Pellet Consumption (Max – Min):	1.5 – 3.6kg/hr
Pellet Tank Capacity:	22kg
Approx. burn time (Min – Max):	6 – 15hrs
Flue Outlet Diameter:	80mm
Electrical Requirement (working):	58 - 75W
Electrical Requirement (starting):	300W
Net Weight:	180kg
Dimensions (H x W x D):	581 x 840 x 651mm



*Specifications & products are indicative only, may differ from those shown and may change at any time & without notice. E & OE.*

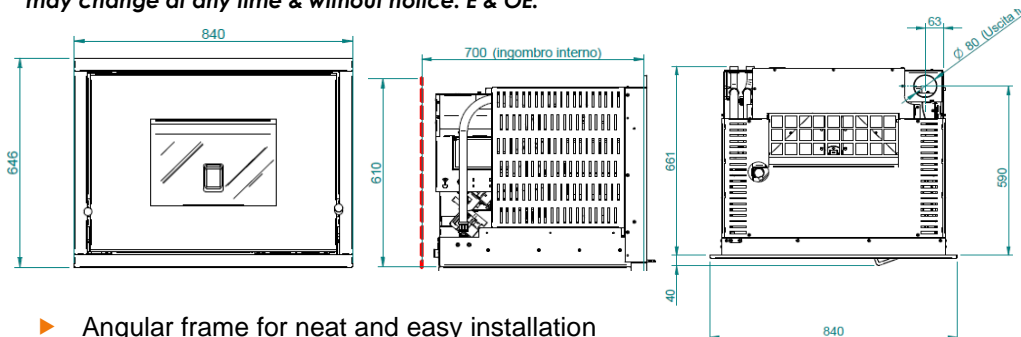

- ▶ Angular frame for neat and easy installation
- ▶ Timed and thermostatic controls
- ▶ Remote control as standard
- ▶ Stunning, modern design with full glass door & large viewing window
- ▶ Optional loading chute for loading whilst operating
- ▶ Optional pedestal frame to support stove in false fireplaces
- ▶ Optional remote access control through wi-fi & smartphone app

**Your trusted local dealer:**



EN 14785



15a B-VG

