

## 98 CAST IRON 10D DUCTABLE STOVE – TECHNICAL DATA

Wood pellet stove for space heat only



Option to duct heat into one additional room (8m max.)

Room-sealed stove – ideal for Passive House or NZEB

Average Thermal Heat Input (Min - Max):	2.45 - 10kW
Performance Efficiency (Min - Max):	95.59 - <b>97.86%</b>
Nominal Overall Power Yield (Min - Max):	2.4 - 9.3kW
Approx. Heating Capacity - Poor Insulation:	40m <sup>3</sup> - 150m <sup>3</sup>
Approx. Heating Capacity - Good Insulation:	115m <sup>3</sup> - 450m <sup>3</sup>
Pellet Consumption (Min - Max):	0.5 - 2.06kg/hr
Pellet Tank Capacity:	30 - 20kg
Approx. burn time (Min - Max):	9.5 - 39hrs
Flue Outlet Diameter:	80mm
Electrical Requirement (Normal):	87W
Electrical Requirement (Starting):	300W
Net Weight:	107kg
Approx. dimensions (H x W x D):	1,080 x 500 x 520mm



**NB:** Specifications & products are indicative only, may differ from those shown and may change at any time & without notice. E & OE



Available in a selection of colours: black, red or white



Wi-Fi




PDA



Ducted

- ✓ 98% Efficiency
- ✓ Room-sealed stove
- ✓ Cast iron body
- ✓ Natural convection option
- ✓ Exceptionally low noise
- ✓ Personal Digital Assistant
- ✓ Ducted option with individual room control

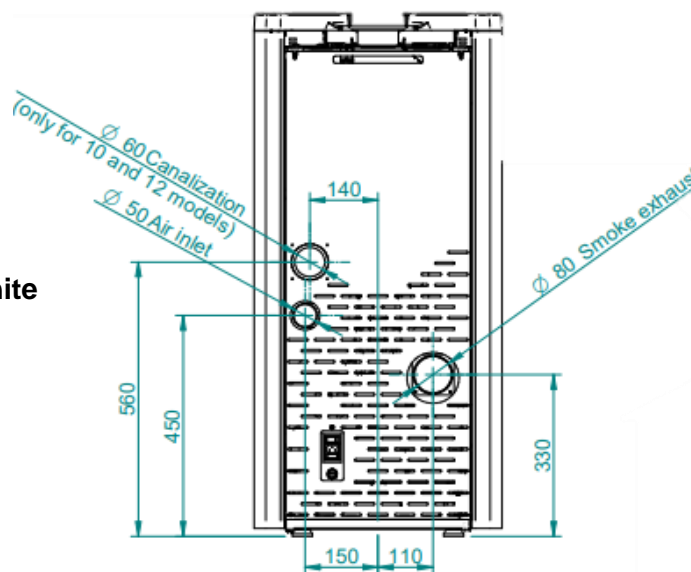

Your trusted local dealer



Swiss Cantonal Association for Fire Safety



Conformity Label



Precisely Right

15a B-VG



Scandinavian Independent Research Body



German Organisation for the Development of Biomass

**EN 14785**

European Standard for Heating Appliances



Sustainable Energy Authority of Ireland

